

## REMARKS

Claims 1-30 are pending. In this amendment, claims 1, 7, 14, 23, and 27 are amended to define with more specificity embodiments of the invention. No new matter is entered.

### Informalities:

With this amendment, the section headings of the application are amended to remove the underlining, as requested by the Examiner. Additionally, the reference number "32" is added in FIG. 4, as shown in the attached replacement drawing, also as requested by the Examiner.

### Claimed embodiments of the invention

Claimed embodiments of the invention are directed to a system for providing power to a computer mouse or other peripheral using inductive power transfer. A source loop is energized to create a constantly changing magnetic field. The victim loop is positioned within the created magnetic field, and an induced voltage and current flows in the victim loop. The victim loop can be coupled to a circuit to be powered, such as a mouse circuit. Or, conveniently, the victim loop can be structured to charge a power storage device in the mouse, such as a battery.

### Differences between the claimed embodiments and the cited art

Published Japanese abstract 2001-159948 to Shimono (Shimono) is difficult to fully understand because of the poor machine translation. It appears to include two grids of wires in a mousepad, Lx and Ly (Drawing 2) laid out in a perpendicular grid pattern. Although Shimono purports to inductively transfer power to a mouse, it is hard to understand how this is possible.

More particularly, any induced magnetic field produced by electricity flowing in a first direction is offset by the electricity flowing in the opposite direction. With reference to Drawing 2, and specifically to the grid of Lx, assume current flows from the point "X1" to "X2." Any induced magnetic field produced in the left-most wire of Lx (current flowing "upward" in drawing 2) is offset by the magnetic field produced in the next-to-left-most wire of Lx, where current is flowing "downward."

Shimono himself, in the "Example" section, beginning at line 9 says "In the pad coils Lx and Ly, since the current of a retrose [sic] is flowing mutually to adjacent wire, the

electromagnetic wave radiated from each wire is offset, and at the distant place (for example, 3m), radiation electromagnetic field become a low thing from a mouse pad entirely.”

In other words, magnetic flux from a first wire is offset from an adjacent wire, and the overall net magnetic field produced by Simono is zero.

Claimed embodiments of the invention, conversely, do not use a planer source whatsoever for producing the magnetic field. In these embodiments, the source coil is a solenoid, which is a three-dimensional structure.

The “New IEEE Standard Dictionary of Electrical and Electronics Terms, Fifth Edition” defines “Solenoid” as: “An electric conductor wound as a helix with a small pitch, or as two or more coaxial helixes.” (emphasis added). This definition is attached as Exhibit A to this amendment.

Using a solenoid or non-planar structure as a source loop allows the magnetic flux to flow in a single direction throughout the entire core of the solenoid. This is illustrated, for example in Figures 2 and 3 of the application. In those figures, the source loop is a three-dimensional structure that causes the magnetic flux to travel in a relatively straight line through the middle of the source loop. Adding a relatively strong magnetically permeable material, such as iron filings to the mousepad, causes an even stronger magnetic field to travel through the solenoid, as illustrated in Figure 3.

Using a solenoid structure as a source loop is not taught nor suggested by the teachings of using a planar grid structure as the source “loop” structure. Because mousepads are planar structures, inventors would be inclined to use a planar structure. Indeed, in the references cited, all of the source “loops” are described and illustrated as planar structures. These prior inventors never conceived of using a three-dimensional structure, even though it would have helped their effort had they done so. Therefore, the claimed embodiments of the invention are novel and non-obvious changes to the prior art, and are thus patentable.

In particular, the prior art does not teach or suggest a “a source loop solenoid” as recited in claims 1, 23, and 27, and a “non-planar magnetic source loop” as recited in claim 14.

Additionally, many of the dependent claims include features and advantages also not taught nor suggested by the prior art. For instance, claim 7 recites that the “victim loop is a coil of wire having a solenoid shape,” which is not shown anywhere in the prior art, as both Shimono and Tien (GB 2314470) show that the victim loop is also planar (Shimono, Drawing 3, and Tien, Fig. 3).

Also, claim 22 indicates that the source loop and the victim loop are "horizontally overlapped." This embodiment is illustrated in, for example, Figure 8 of the specification, where portions of both the mouse 30 and mousepad 20 are aligned in the same horizontal plane. In both Simono and Tien, the mouse is always described or shown as lying over the mousepad. See, for example, Drawing 15 of Simono (mouse and mousepad are separated by the dotted line) and Figure 3 of Tien.

For the foregoing reasons, reconsideration and allowance of claims 1-30 of the application as amended is solicited. The Examiner is encouraged to telephone the undersigned at (503) 222-3613 if it appears that an interview would be helpful in advancing the case.

**Customer No. 20575**

Respectfully submitted,

MARGER JOHNSON & McCOLLOM, P.C.  
Attorneys for Intel Corporation

By Kevin S. Ross,  
Reg. No. 42,116

MARGER JOHNSON & McCOLLOM, P.C.  
1030 SW Morrison Street  
Portland, OR 97205  
503-222-3613

I hereby certify that this correspondence  
is being deposited with the United States  
Postal Service as first class mail in an  
envelope addressed to: Commissioner for  
Patents, P.O. Box 1450, Alexandria, VA,  
22313-1450  
Date: March 8, 2004

Kevin Ross

IEEE Std 100-1992

# The New IEEE Standard Dictionary of Electrical and Electronics Terms



**Fifth Edition**  
**Newly Revised and Expanded**



IEEE

Published by the  
Institute of  
Electrical and  
Electronics  
Engineers, Inc.

BEST AVAILABLE COPY

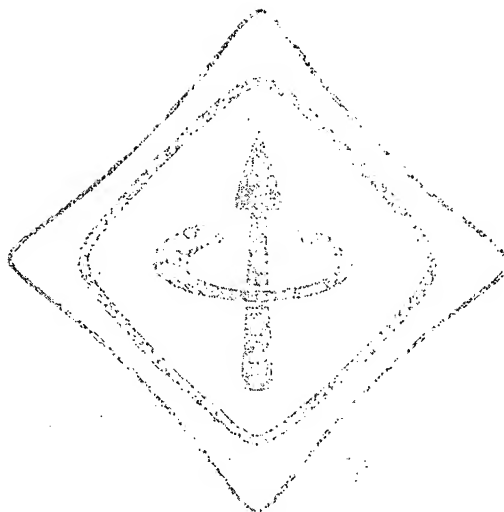

The Institute of Electrical and Electronics Engineers, Inc.  
345 East 47th Street, New York, NY 10017-2394, USA

Copyright © 1993 by the  
Institute of Electrical and Electronics Engineers, Inc.  
All rights reserved. Published 1993  
Printed in the United States of America

ISBN 1-55937-240-0

*No part of this publication may be reproduced in any form,  
in an electronic retrieval system or otherwise,  
without the prior written permission of the publisher.*

January 15, 1993

SH15594

mi  
an  
Me  
Th  
op  
jec  
ha  
da  
I  
Sta  
sur  
sco  
tim  
thr  
use  
eve  
tha  
tha  
pre  
hav  
C  
este  
for  
text  
In  
of p  
need  
will  
repr  
that  
inter  
tees  
exce  
sider  
Co  
addr

IE  
and  
invo  
not  
oblig

# BEST AVAILABLE COPY

1244

solar panel

solid-state device

solid-state re

background noise sources by several orders of magnitude. [25]

**solar panel (photovoltaic power system).** See: solar array.

**solar radiation simulator (illuminating engineering).** A device designed to produce a beam of collimated radiation having a spectrum, flux density, and geometric characteristics similar to those of the sun outside the earth's atmosphere. [126]

**solar wind (communication satellite).** Energetic particles emitted by the sun and traveling through space. [19]

**solderability.** That property of a metal surface to be readily wetted by molten solder. [105]

**soldered joints.** The connection of similar or dissimilar metals by applying molten solder, with no fusion of the base metals. [105]

**solder projections.** Icicles, nubs, and spikes are undesirable protrusions from a solder joint. [105]

**solder splatter.** Unwanted fragments of solder. [105]

**solenoid.** An electric conductor wound as a helix with a small pitch, or as two or more coaxial helices. See: solenoid magnet. 270-1966w

**solenoid magnet (solenoid) (industrial control).** An electromagnet having an energizing coil approximately cylindrical in form, and an armature whose motion is reciprocating within and along the axis of the coil. 270-1966w, [60]

**solenoid relay.** See: plunger relay.

**soleplate (rotating machinery).** A support fastened to a foundation on which a stator frame foot or a bracket arm can be mounted. See: slide rail. [9]

**solicited messages.** A negotiated data transfer in message space. See: data transfer; message space. 1296-1987

**solid angle (laser-maser) ( $\omega$ ).** The ratio of the area on the surface of a sphere to the square of the radius of that sphere. It is expressed in steradians. 586-1980w

**solid angle factor,  $Q$  (illuminating engineering).** A function of the solid angle ( $\omega$ ) subtended by a source and is given by

$$Q = 20.4\omega = 1.52\omega^{0.2} - 0.075$$

See: index of sensation. [126]

**solid-beam efficiency (antennas).** The ratio of the power received over a specified solid angle when an antenna is illuminated isotropically by uncorrelated and unpolarized waves to the total power received by the antenna. Note: This term is sometimes used to mean the power received corresponding to a particular polarization over the solid angle to the total power

received. Equivalently, the term is used to mean the power radiated over a specified solid angle by the antenna corresponding to a particular polarization to the total power radiated. 145-1983

**solid bushing (outdoor electric apparatus).** A bushing in which the major insulation is provided by a ceramic or analogous material. 21-1976

**solid conductor.** A conductor consisting of a single wire. See: conductor. [10]

**solid contact.** A contact having relatively little inherent flexibility and whose contact pressure is supplied by another member. C37.100-1981

**solid coupling (rotating machinery).** A coupling that makes a rigid connection between two shafts. See: rotor (rotating machinery). [9]

**solid electrolytic capacitor.** A capacitor in which the dielectric is primarily an anodized coating on one electrode, with the remaining space between the electrodes filled with a solid semiconductor. 43-1974

**solid enclosure.** An enclosure that will neither admit accumulations of flyings or dust nor transmit sparks or flying particles to the accumulations outside. [119]

**solid-iron cylindrical-rotor generator.** See: cylindrical-rotor generator.

**solidly grounded (power and distribution transformer).** Grounded through an adequate ground connection in which no impedance has been inserted intentionally. Note: Adequate as used herein means suitable for the purpose intended. C57.12.80-1978

**solid-material fuse unit (power switchgear).** A fuse unit in which the arc is drawn through a hole in solid material. C37.40-1981, C37.100-1981

**solid modeling.** A method of displaying solid constructions on a graphical display device using geometric forms such as cubes, cones, spheres, and cylinders. 610.6-1991

**solid-pole synchronous motor.** A salient-pole synchronous motor having solid steel pole shoes, and either laminated or solid pole bodies. [9]

**solid rotor (rotating machinery).** (A) A rotor, usually constructed of a high-strength forging, in which slots may be machined to accommodate the rotor winding. (B) A spider-type rotor in which spider hub is not split. See: rotor (rotating machinery). [9]

**solid-state component.** A component whose operation depends on the control of electric or magnetic phenomena in solids, for example, a transistor, crystal diode, ferrite core. [20], [85]

**solid-state device (control equipment).** A device that may contain electronic components that do not depend on electronic conduction in

a vacuum performed otherwise as resistor

**solid-state switchgear.** structured ex

**solid-state** which all o to electro array of th facsimile

**solid-type** nated, pap ered, in wl of internal

**solution.** Se

**solvent cle** means of ing.

**solventless** applied to paints, im pounds th weight or or semisol

**somatic cel**

**son.** See: ch

**sonar (navi** for sonic a communic

**son file.** A f updated f father file file.

**sonic delay**

**sonic dept** direct rea the dept interval b return of

**sonic pen.** audio sig

**sonne (na** navigator character time sequ by observ at which t following.

**sonobuoy** ( equipmen radio sigr sound sig

**sort (1).** To sequence